

---

# Comment paramétrer votre modem **TP-Link M7200?**

La connexion de votre modem n'est pas disponible ? Nous avons la solution !

# La prise en main

de votre modem TP-Link M7200

**Vous avez un problème  
d'accès à internet ?**

**PAS DE PANIQUE !**

Nous allons vous aider à paramétrer  
votre modem.




# Le paramétrage

de votre modem Huawei

1

**Identifiez votre routeur :**  
**Allumez le galet et connectez-vous au modem Wifi** via votre fenêtre d'accès internet

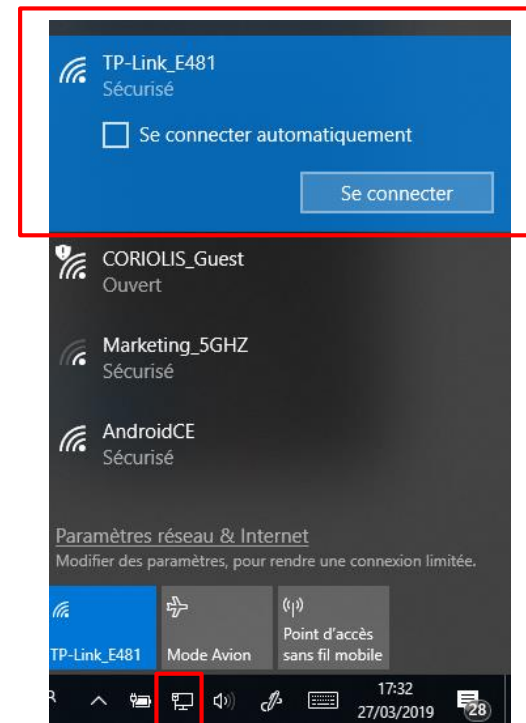

# Le paramétrage

## de votre modem TP-Link


2

**Accédez au site de paramétrage :**

Rendez-vous sur le site : <http://tplinkmifi.net>

ou <http://192.168.0.1>

**Mot de passe : admin**

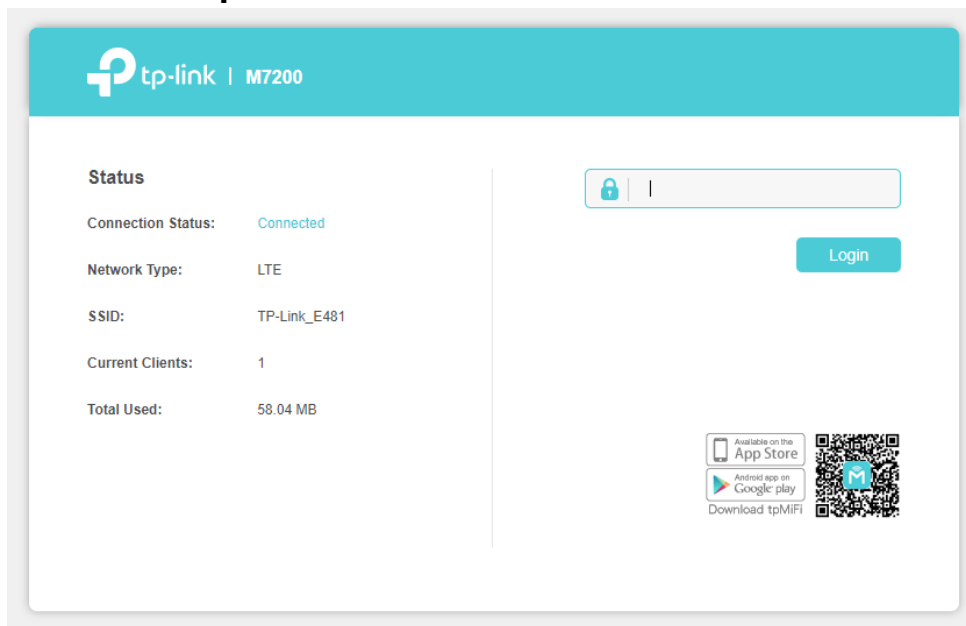

The screenshot shows the TP-Link M7200 MIFI management interface. At the top, there is a teal header with the TP-Link logo and the text "tp-link | M7200". Below the header, the interface is divided into two main sections. On the left, there is a "Status" section with the following information:

Connection Status:	Connected
Network Type:	LTE
SSID:	TP-Link_E481
Current Clients:	1
Total Used:	58.04 MB

On the right side, there is a login form consisting of a password input field with a lock icon on the left and a "Login" button to its right. Below the login form, there are two buttons for downloading the TP-Link MIFI app: "Available on the App Store" and "Android app on Google play". To the right of these buttons is a QR code with a TP-Link logo in the center, and the text "Download tpMIFI" is positioned below the QR code.

# Le paramétrage

## de votre modem TP-Link

2

**Personnalisez le mot de passe administrateur :**  
**Il doit contenir de 1 à 15 caractères**


The screenshot displays the TP-Link M7200 modem configuration web interface. At the top, there is a teal navigation bar with the TP-Link logo and 'M7200' on the left, and four menu items: 'Wizard' (selected), 'Status', 'SMS', and 'Advanced'. Below the navigation bar is a progress indicator with four steps: 'Time Zone', 'Dial-up Settings', 'Wireless Settings', and 'Finish'. The 'Dial-up Settings' step is currently active. A white dialog box titled 'Set up a password' is overlaid on the interface. It contains the instruction 'Password should contain 1 to 15 characters excluding spaces.' and two input fields: 'New Password:' and 'Confirm Password:'. The 'New Password' field has a strength indicator below it with three tabs: 'Low' (selected), 'Middle', and 'High'. The 'Confirm Password' field has a checkmark icon to its right. A teal 'Confirm' button is located at the bottom right of the dialog box.

# Le paramétrage

## de votre modem TP-Link

2

Sélectionnez votre « Time zone »  
Et cliquez sur « Next »

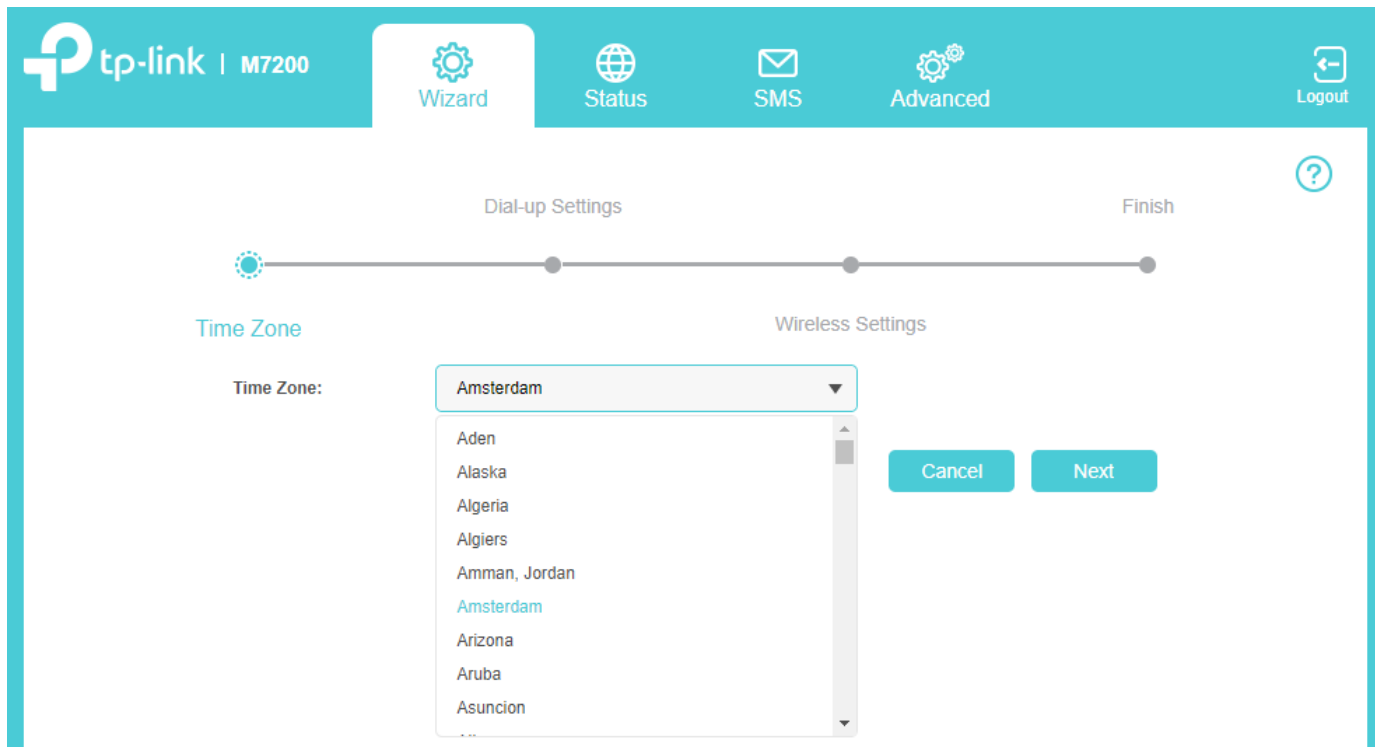

The screenshot displays the TP-Link M7200 modem configuration wizard. The interface is teal and white. At the top, the TP-Link logo and 'tp-link | M7200' are on the left. Navigation icons for 'Wizard', 'Status', 'SMS', 'Advanced', and 'Logout' are in the center and right. A progress bar shows four steps: 'Time Zone' (active), 'Dial-up Settings', 'Wireless Settings', and 'Finish'. The 'Time Zone' section has a label 'Time Zone:' and a dropdown menu with 'Amsterdam' selected. The dropdown list includes: Aden, Alaska, Algeria, Algiers, Amman, Jordan, Amsterdam, Arizona, Aruba, and Asuncion. 'Cancel' and 'Next' buttons are on the right. A help icon (?) is in the top right corner.

tp-link | M7200

Wizard Status SMS Advanced Logout

Dial-up Settings Finish

Time Zone Wireless Settings

Time Zone:

Amsterdam

Aden  
Alaska  
Algeria  
Algiers  
Amman, Jordan  
Amsterdam  
Arizona  
Aruba  
Asuncion

Cancel Next

# Le paramétrage

## de votre modem TP-Link

4

**Créez un nouvel APN Internet : coriolis**  
Cliquez sur « **Create** ».

Welcome to TP-Link Mobile Wi-Fi

tp-link | M7200

Wizard Status SMS Advanced Logout

**Dial-up**

- Dial-up Settings
- Network Settings
- PIN Management
- ISP Update
- USSD

Wireless

NAT Forwarding

DHCP Server

Data Usage Settings

Power Saving

Device

### Dial-up Settings

Mobile Data:

Data Roaming:

Profile List:  **Create**

Profile Name:

PDP Type: IPv4

APN Type: Static

APN:

Authentication Type: CHAP

Username:

Password:

Save

# Le paramétrage

## de votre modem TP-Link

5

### Créez un nouvel APN Internet : coriolis

Inscrivez « coriolis ». Dans « Profile Name » et « APN » et cliquez sur «SAVE»

The screenshot shows the TP-Link M7200 modem web interface. The top navigation bar includes 'Wizard', 'Status', 'SMS', 'Advanced', and 'Logout'. The left sidebar shows 'Dial-up' as the active section, with sub-items: 'Dial-up Settings', 'Network Settings', 'PIN Management', 'ISP Update', and 'USSD'. Below this are 'Wireless', 'NAT Forwarding', and 'DHCP Server'. The main content area is titled 'Dial-up Settings' and contains the following fields:

- Profile Name: coriolis
- PDP Type: IPv4
- APN Type: Static
- APN: coriolis
- Authentication Type: CHAP
- Username: (empty)
- Password: (empty)

A note at the bottom states: 'Note: If you are not sure about your APN (Access Point Name), contact your internet service provider.' At the bottom right, there are 'Cancel' and 'Save' buttons.